

Specification

Nominal Voltage	12V
Nominal Capacity(20HR)	2.3AH
Dimension	Length 178± 1mm (7.00 inches)
	Width 35± 1mm (1.38 inches)
	Container Height 60± 1mm (2.36 inches)
	Total Height (with Terminal) 66± 1mm (2.60 inches)
Approx Weight	Approx 1.0 kg (2.21lbs)
Terminal	T1
Container Material	ABS
Rated Capacity	2.30 AH/0.115A (20hr ,1.80V/cell,25°C/77°F)
	2.14AH/0.214A (10hr,1.80V/cell,25°C/77°F)
	1.95 AH/0.39A (5hr,1.75V/cell,25°C/77°F)
	1.79 AH/0.59A (3hr,1.75V/cell,25°C/77°F)
	1.44 AH/1.44A (1hr,1.60V/cell,25°C/77°F)
Max. Discharge Current	34.5A (5s)
Internal Resistance	Approx 90mΩ
Operating Temp.Range	Discharge : -15 ~ 50°C (5 ~ 122°F)
	Charge : 0~40°C (32 ~ 104°F)
	Storage : -15~40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25 ±3°C (77 ±5°F)
Cycle Use	Initial Charging Current less than0.69A.Voltage 14.4V~15.0V at 25° C(77° F)Temp. Coefficient -30mV/°C
	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25° C(77° F)Temp. Coefficient -20mV/°C
Standby Use	
Capacity affected by Temperature	40° C (104° F) 103%
	25° C (77° F) 100%
	0° C (32° F) 86%
Self Discharge	PowerStar batteries may be stored for up to 6 months at 25° C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.



Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4.38	3.36	2.79	2.41	1.86	1.37	1.16	0.68	0.54	0.44	0.355	0.308	0.248	0.207	0.114
1.80V/cell	5.88	4.30	3.37	2.85	2.20	1.60	1.30	0.75	0.58	0.46	0.381	0.330	0.263	0.214	0.115
1.75V/cell	6.63	4.72	3.68	3.06	2.28	1.66	1.36	0.77	0.59	0.47	0.391	0.339	0.268	0.220	0.116
1.70V/cell	7.30	5.15	3.93	3.22	2.37	1.72	1.40	0.79	0.60	0.49	0.401	0.346	0.272	0.224	0.118
1.65V/cell	8.05	5.55	4.17	3.42	2.51	1.77	1.43	0.81	0.63	0.50	0.412	0.354	0.276	0.229	0.120
1.60V/cell	8.88	6.03	4.46	3.64	2.65	1.84	1.44	0.84	0.65	0.52	0.426	0.362	0.279	0.231	0.121

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	8.01	6.21	5.20	4.54	3.55	2.64	2.23	1.33	1.04	0.85	0.696	0.605	0.490	0.411	0.226
1.80V/cell	10.6	7.85	6.20	5.29	4.12	3.04	2.49	1.44	1.12	0.90	0.743	0.647	0.518	0.423	0.227
1.75V/cell	11.7	8.48	6.69	5.64	4.25	3.13	2.59	1.49	1.13	0.92	0.760	0.662	0.526	0.433	0.229
1.70V/cell	12.6	9.04	7.04	5.88	4.40	3.24	2.66	1.52	1.16	0.94	0.778	0.675	0.533	0.442	0.233
1.65V/cell	13.7	9.66	7.43	6.20	4.60	3.29	2.70	1.53	1.21	0.97	0.797	0.688	0.540	0.450	0.236
1.60V/cell	14.7	10.25	7.81	6.53	4.82	3.41	2.72	1.59	1.24	1.00	0.820	0.700	0.544	0.454	0.237




Dimensions

T1 Terminal


Unit: mm [inches]

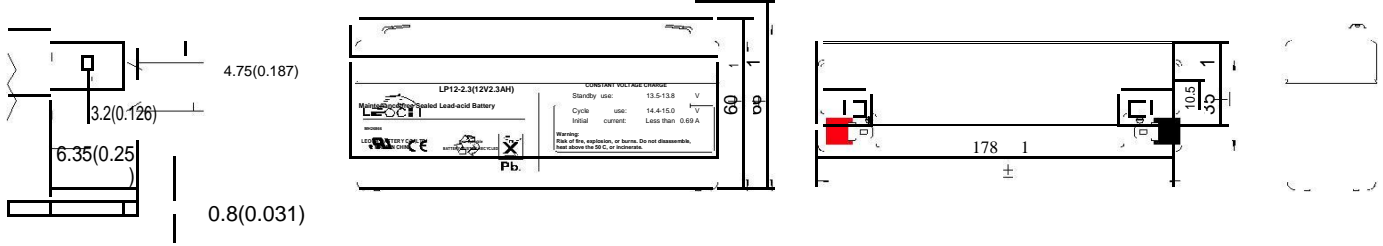


Discharge Characteristics

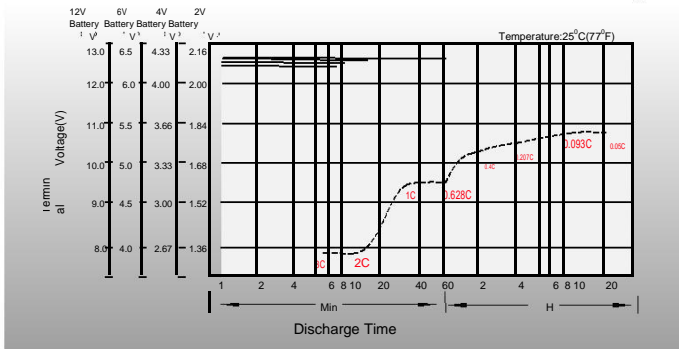


Float Charging Characteristics

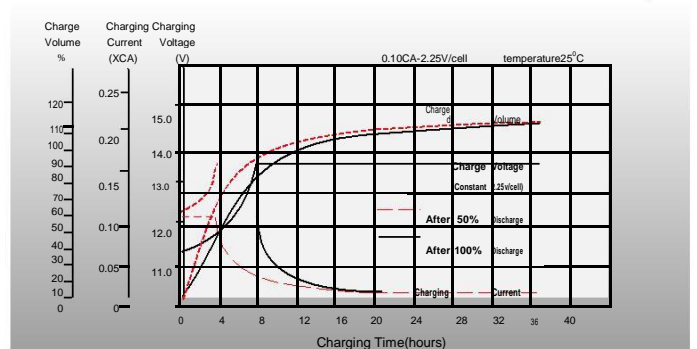


Temperature Effects in Relation to Battery Capacity

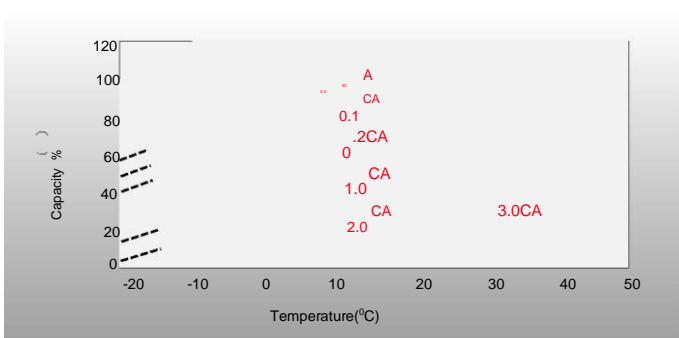


Effect of Temperature on Long Term Float Life

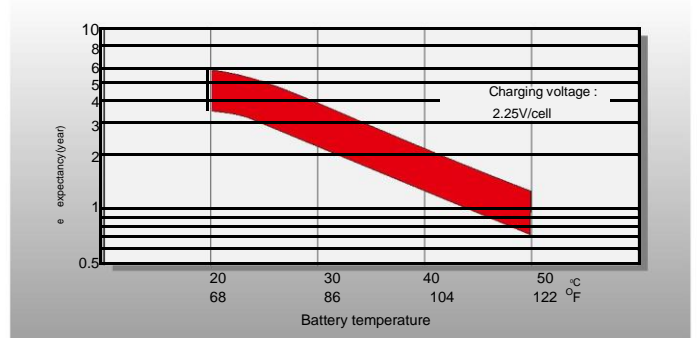

Cycle Life in Relation to Depth of Discharge

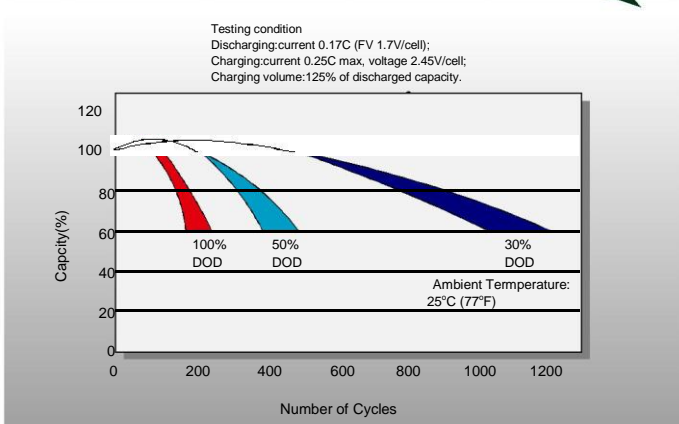

Self Discharge Characteristics

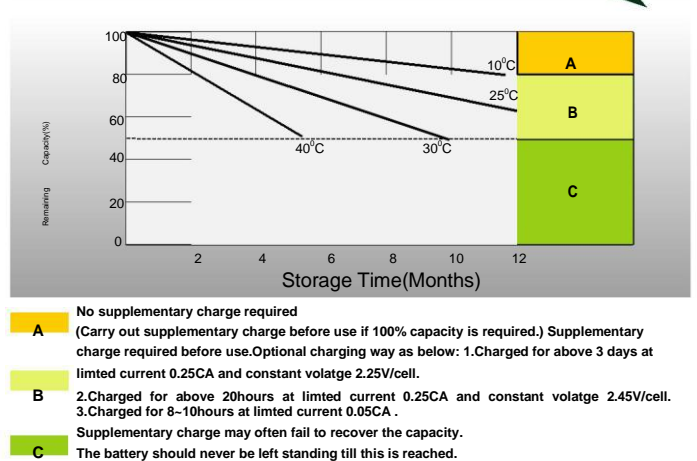

Sales Office

PowerStar sales office:

Add: BatteryJack Inc

772 Twin Rail Dr, Minooka, IL 60447

Tel: 888-30-POWER

Fax: 815-467-7420

E-mail: sales@batteryjack.com

Http://www.powerstarsla.com