



General Purpose


PS12-80S (12V80AH)

Specification		
Nomial Voltage	12V	
Nomial Capacity(10HR)	80.0AH	
Dimension	Length	± (13.7 inches)
	Width	± (6.57 inches)
	Container Height	± (7.01 inches)
		±
Approx Weight	Approx 22.6 kg (49.8lbs)	
Terminal	T6	
Container Material	ABS	
Rated Capacity	83.2 AH/4.16A	(20hr ,1.80V/cell,25 ⁰ C/77 ⁰ F)
	80.0 AH/8.0A	(10hr,1.80V/cell,25 ⁰ C/77 ⁰ F)
	69.0 AH/13.8A	(5hr,1.75V/cell,25 ⁰ C/77 ⁰ F)
	62.4 AH/20.8A	(3hr,1.75V/cell,25 ⁰ C/77 ⁰ F)
	48.8 AH/48.8A	(1hr,1.60V/cell,25 ⁰ C/77 ⁰ F)
Max. Discharge Current	960A (5s)	
Internal Resistance	Approx 6mΩ	
Operating Temp.Range	Discharge : -15 ~ 50 ⁰ C (5~ 122 ⁰ F)	
	Charge : 0~40 ⁰ C (32 ~ 104 ⁰ F)	
	Storage : -15~40 ⁰ C (5~ 104 ⁰ F)	
Nominal Operating Temp. Range	25 ±3 ⁰ C (77 ±5 ⁰ F)	
Cycle Use	Initial Charging Current less than24.0A.Voltage 14.4V~15.0V at 25 ⁰ C(77 ⁰ F)Temp. Coefficient -30mV/ ⁰ C	
Standby Use	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25 ⁰ C(77 ⁰ F)Temp. Coefficient -20mV/ ⁰ C	
Capacity affected by Temperature	40 ⁰ C (104 ⁰ F)	103%
	25 ⁰ C (77 ⁰ F)	100%
	0 ⁰ C (32 ⁰ F)	86%
Self Discharge	PowerStar batteries may be stored for up to 6 months at 25 ⁰ C(77 ⁰ F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system Electronic
- ◆ apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

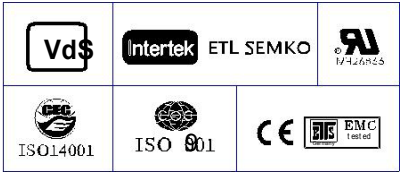

Constant Current Discharge (Amperes) at 25 °C (77°F)



F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	136.9	107.6	91.5	76.6	60.9	46.1	37.7	24.0	19.0	15.5	12.5	10.9	8.84	7.55	4.12
1.80V/cell	183.8	137.5	110.6	90.5	71.8	53.6	42.2	26.2	20.4	16.6	13.4	11.7	9.38	8.00	4.16
1.75V/cell	207.2	151.1	120.8	97.4	74.6	55.6	44.2	27.2	20.8	16.9	13.8	12.0	9.54	8.08	4.20
1.70V/cell	228.2	164.7	129.0	102.3	77.6	57.8	45.6	28.3	21.4	17.4	14.1	12.2	9.67	8.16	4.28
1.65V/cell	251.6	177.8	137.2	108.7	81.9	59.3	47.1	29.1	22.3	18.0	14.5	12.5	9.82	8.33	4.34
1.60V/cell	277.5	193.0	146.7	115.8	86.4	61.8	48.8	30.0	23.0	18.5	15.0	12.8	9.92	8.42	4.36

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	250.3	198.8	170.8	144.3	116.0	88.5	72.7	46.7	37.0	30.3	24.5	21.4	17.4	14.9	8.16
1.80V/cell	332.5	251.1	203.6	168.1	134.8	102.2	81.1	50.6	39.6	32.2	26.2	22.9	18.5	15.8	8.23
1.75V/cell	366.9	271.5	219.7	179.1	138.8	105.0	84.4	52.3	40.2	32.8	26.8	23.4	18.7	15.9	8.30
1.70V/cell	392.8	289.2	231.3	186.8	143.6	108.8	86.8	54.2	41.2	33.6	27.4	23.9	19.0	16.1	8.45
1.65V/cell	427.0	309.2	244.0	197.0	150.3	110.5	89.1	55.4	42.8	34.7	28.1	24.3	19.2	16.4	8.55
1.60V/cell	460.1	328.1	256.7	207.5	157.5	114.6	91.7	57.0	43.9	35.6	28.9	24.8	19.4	16.5	8.58

Dimensions


T6 Terminal
Unit: mm [inches]

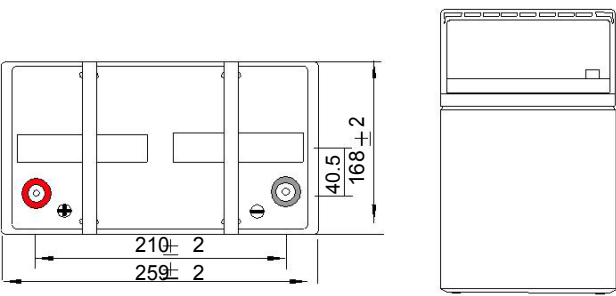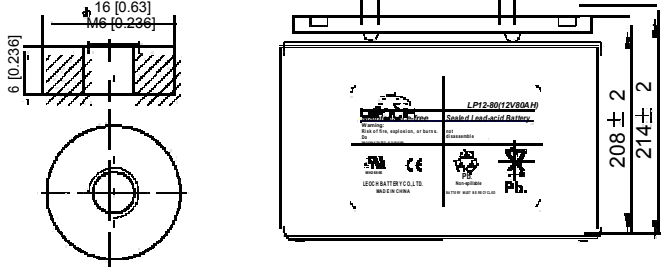


Discharge Characteristics

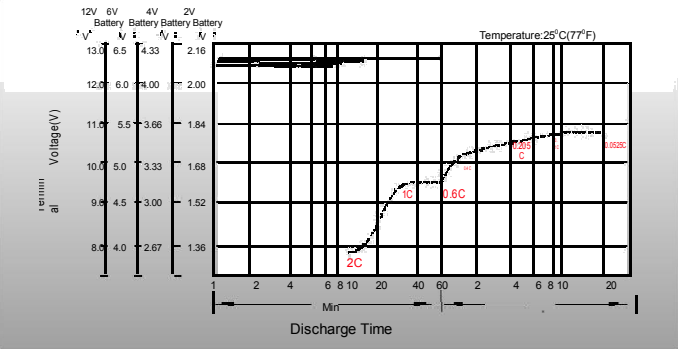


Float Charging Characteristics

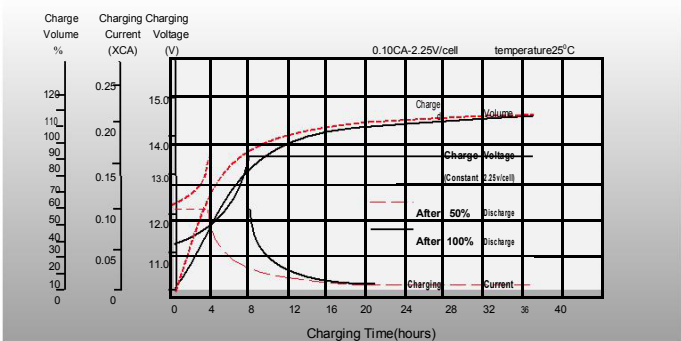


Temperature Effects in Relation to Battery Capacity

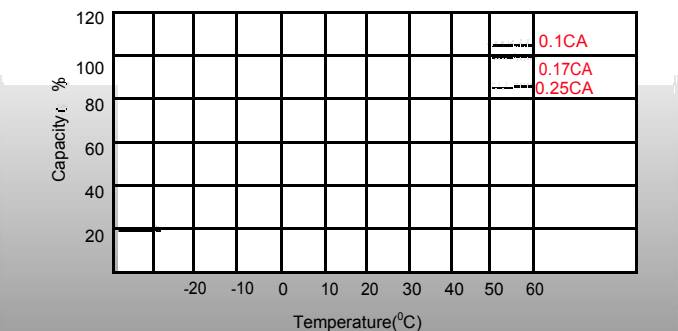


Effect of Temperature on Long Term Float Life

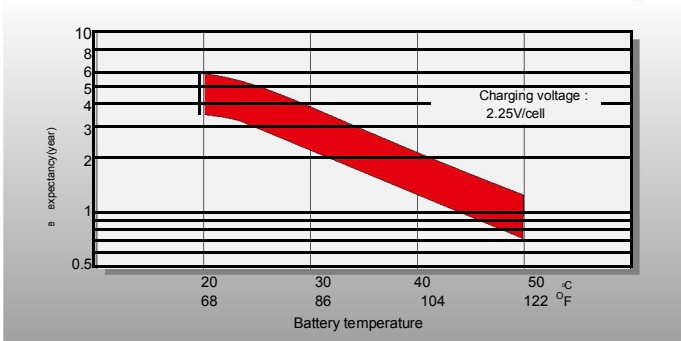

Cycle Life in Relation to Depth of Discharge

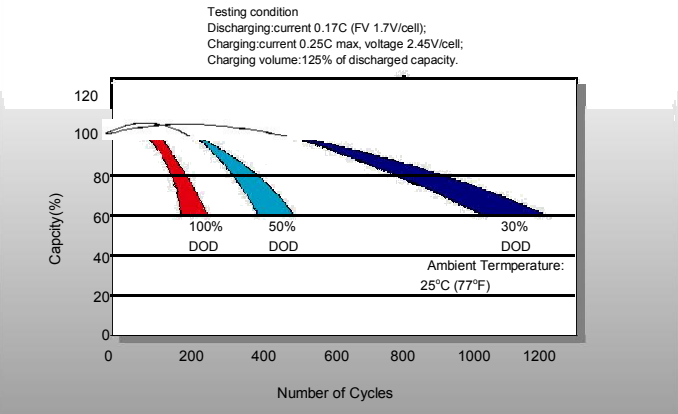

Self Discharge Characteristics

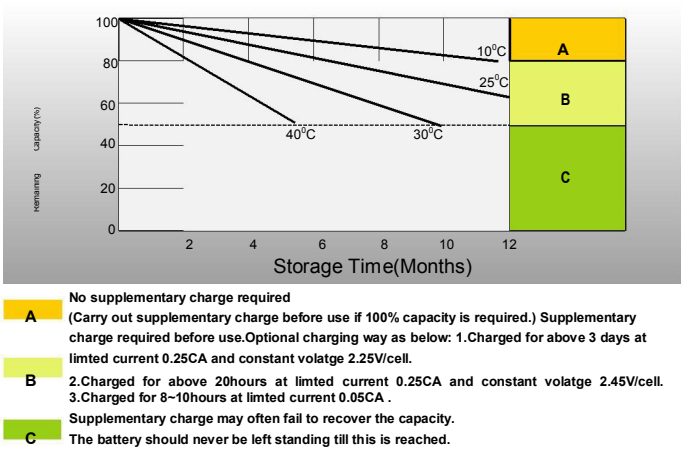

Sales Office

PowerStar sales office:

Add: BatteryJack Inc
772 Twin Rail Dr, Minooka, IL 60447
Tel: 888-30-POWER
Fax: 815-467-7420
E-mail: sales@batteryjack.com
Http://www.powerstarsla.com