

# BANSHEE™


"IT'S NOT A BATTERY, IT'S A BANSHEE"

## SEALED MARINE BATTERY

Specification	AGM Deep cycle 12V75AH
Cells Per Unit	6
Voltage Per Unit	12
Capacity	75Ah@10hr-rate to 1.75V per cell @25°C
Weight	Approx. 21.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 9.5 mΩ
Terminal	F15(M6)/F11(M6)
Max. Discharge Current	700A (5 sec)
Design Life	12 years (floating charge)
Max. Charging Current	14.0 A
Reference Capacity	C3 54.0AH C5 61.0AH C10 75.0AH C20 80.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2 V~14.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	Maxpower Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.





DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharge. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment, V, telecom, broadband and cable TV, UPS systems etc.



L: 10.27 in (260.1 mm)  
W: 6.61 in (167.9 mm)  
H: 8.26 in (210.1 mm)  
TH: 9.33 in (237 mm)  
Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Terminals

#### Marine Combo Post

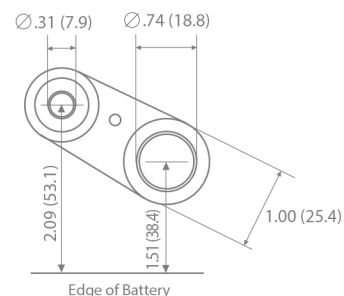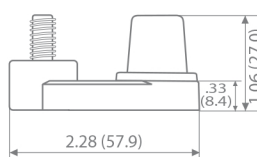

Edge of Battery

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	111.2	91.1	60.4	38.0	23.2	17.4	13.9	11.7	7.88	6.50	3.64
1.65V	105.0	87.1	58.0	36.7	22.5	16.9	13.5	11.4	7.79	6.42	3.59
1.70V	96.7	81.6	55.4	35.5	21.7	16.4	13.1	11.1	7.67	6.32	3.54
1.75V	88.5	75.9	53.0	34.2	21.0	15.9	12.8	10.8	7.56	6.24	3.50
1.80V	80.1	70.1	50.6	32.9	20.2	15.4	12.4	10.5	7.44	6.16	3.46
1.85V	65.5	58.2	43.6	29.5	18.5	14.3	11.6	9.79	6.98	5.80	3.29


### Constant Power Discharge Characteristics : WPC(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	214.7	180.9	124.6	81.2	50.0	37.8	30.3	25.5	17.5	14.5	8.15
1.65V	204.3	173.9	120.7	79.0	48.7	36.9	29.6	25.0	17.3	14.3	8.05
1.70V	193.9	166.9	116.7	76.8	47.3	35.9	28.9	24.4	17.1	14.2	7.95
1.75V	180.7	157.6	112.7	74.4	45.9	35.0	28.3	23.9	16.9	14.0	7.86
1.80V	166.4	147.5	108.8	72.0	44.5	34.1	27.6	23.3	16.6	13.8	7.79
1.85V	138.4	124.2	94.6	64.9	41.0	31.6	25.7	21.8	15.7	13.0	7.41


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C20 should reach 95% after the first cycle and 100% after the third cycle.


### Discharge Characteristics Curve

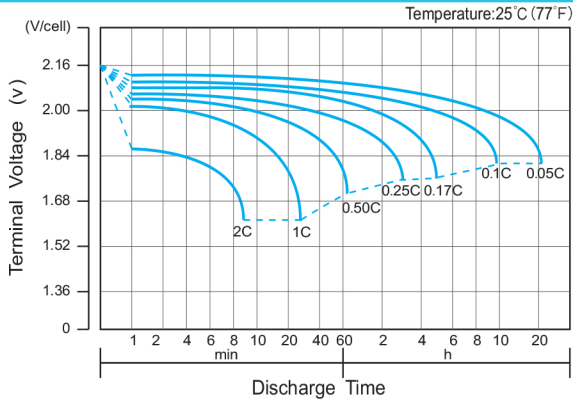


### Charge Characteristic Curve for Cycle Use(IU)

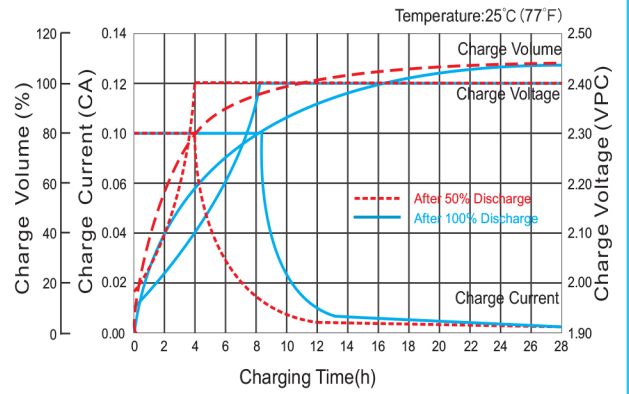


### Cycle Life in Relation to Depth of Discharge

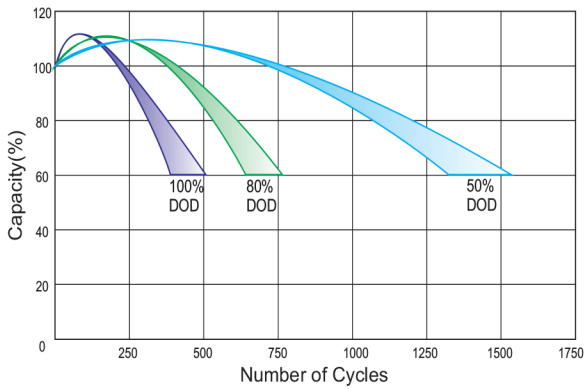


### Relationship Between Charging Voltage and Temperature

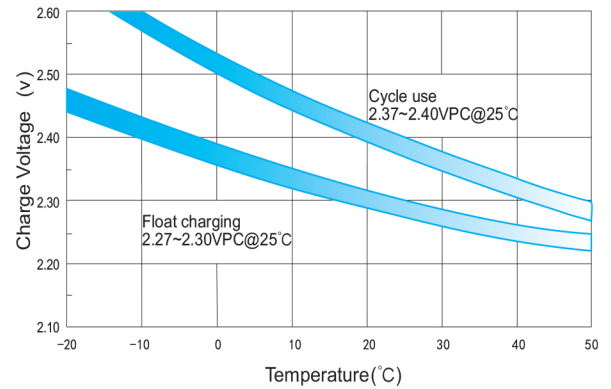


### Temperature Effects on Capacity

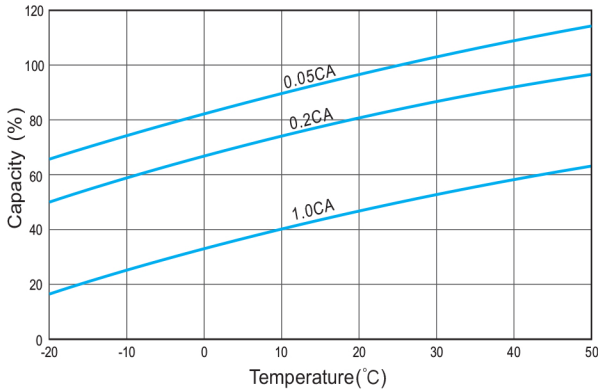

### Storage Characteristics

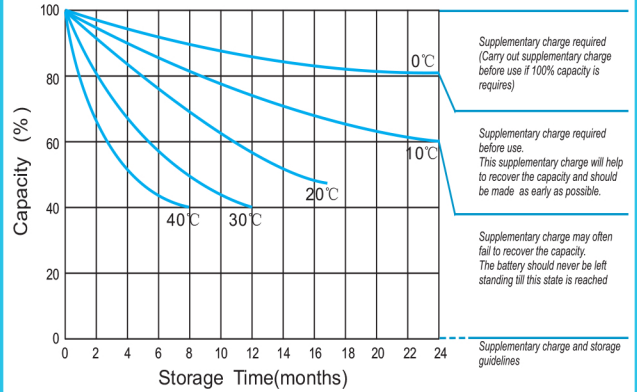

### Effect of Temperature on Long Term Life

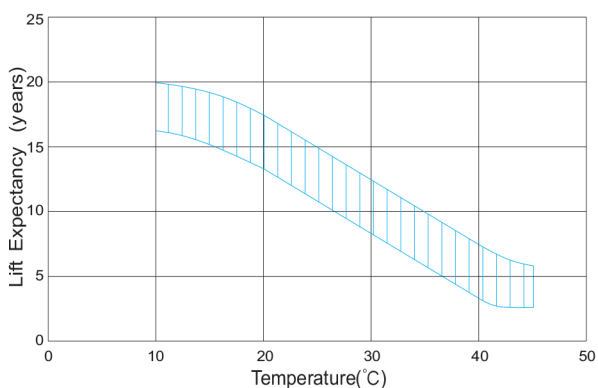

### Relationship of OCV And State of Charge(20°C)

